

de-Broglie Wave-Front Engineering

M. Olshanii, N. Dekker, C. Herzog, and M. Prentiss
 Lyman Laboratory, Harvard University, Cambridge, MA 02138, USA
 E-mail: maxim@atomsun.harvard.edu
 (February 1, 2008)

We propose a simple method for the deterministic generation of an *arbitrary* continuous quantum state of the center-of-mass of an atom. The method's spatial resolution gradually increases with the interaction time with no apparent fundamental limitations. Such *de-Broglie Wave-Front Engineering* of the atomic density can find applications in Atom Lithography, and we discuss possible implementations of our scheme in atomic beam experiments.

Engineering of quantum states has been a widely discussed topic for the last decade. Apart from a purely academic interest, there exist numerous applications of quantum state engineering including preparation of non-classical states of a cavity electromagnetic field, “programming” of a trapped-ion-based quantum computer, and atom lithography. Initial theoretical suggestions [1–4] for the preparation of a *pre-chosen* quantum state of a cavity field were based on the so-called conditional measurement method, where the target state is reached after a “successful” sequence of quantum measurements, while the “unsuccessful” measurement events are discarded. In the schemes [7,8,10], applicable to both cavity light and external motion of a trapped ion, a two-level atom, coupled to the quantum field of interest as well as to a controllable external laser light, plays a role of a “bus”, which transfers, in a prescribed way, population and coherence between the discrete eigenstates of the quantum field. Similar ideas were used to generate an arbitrary internal state of a multilevel atom [9]. According to the suggestions [5,6], the adiabatic population transfer process allows a one-to-one mapping between a quantum state of a Zeeman multiplet and a cavity field.

The quantum state engineering methods listed above deal with systems of a discrete spectrum. In our paper we suggest a simple method to create an arbitrary *continuous* motional state of a free atom starting from a plane wave as an initial condition. The role of a bus, transferring the coherence between the initial and “target” states, is played by an external uniform force field: the “target” motional state is encoded in the time dependence of the amplitude of applied laser light.

The general idea of the set-up for the realization of our *de-Broglie Wave-Front Engineering* scheme was inspired by the precision position measurement technique suggested and experimentally realized by J. E. Thomas

[11]. Let us consider a two-level atom, interacting with a magnetic field $H(z) = -\alpha z$ whose amplitude varies linearly in space. Suppose that the internal atomic state $|1\rangle$ does not interact with the magnetic field (the corresponding Lande factor equals zero: $g_1 = 0$), whereas the Lande factor for the state $|2\rangle$ has a finite value $g_2 = g$. The energy difference between the states $|2\rangle$ and $|1\rangle$ will, thus, depend linearly on the position of the atom:

$$\hbar\omega_{2,1}(z) = \hbar\omega_{2,1}(0) - \mathcal{F}z, \quad (1)$$

where $\hbar\omega_{2,1}(0) = E_2 - E_1$ is the energy difference between $|2\rangle$ and $|1\rangle$ in the absence of the magnetic field, and the gradient force acting on atom in state $|2\rangle$ is $\mathcal{F} = \alpha\mu_{\text{Bohr}}g$. In what follows we will assume, without loss of generality, that both α and g are positive numbers.

Suppose for a moment that our goal is to create the narrowest possible position distribution of atoms in the state $|2\rangle$ centered at a position $z = z^*$, and that the initial condition corresponds to a state $|1\rangle$ atom of some momentum p_0 (whose value we can adjust at will). The simplest (but as we will see below not the optimal) way to approach the above goal is to apply a monochromatic spatially uniform laser field of a frequency $\omega = \omega_{2,1}(z^*)$ for some period of time T (solid vertical arrow, inset for the Fig. 1). As it is shown in the work [11], for a given value of the force $\mathcal{F}$ the spatial width of the distribution of atoms created in the state $|2\rangle$ is limited from below by a value

$$d = \left(\frac{\hbar^2}{2M\mathcal{F}} \right)^{\frac{1}{3}} \quad (2)$$

(the so-called *diffraction limit*) no matter how long the interaction time T is. This limit is reached at a time of the order of

$$\tau = \left(\frac{2\hbar M}{\mathcal{F}^2} \right)^{\frac{1}{3}} \quad (3)$$

At times shorter than the time (3), a wave packet of a minimum position-momentum uncertainty relation ($\delta z \delta p \sim \hbar$) is created. The external force $\mathcal{F}$ broadens the momentum distribution according to $\delta p \sim \mathcal{F}T$, and, therefore, the spatial width of the state $|2\rangle$ distribution decreases with time as $\delta z \sim \hbar/\mathcal{F}T$. For long interaction times though, the peak width starts increasing quadratically as the interaction time increases (see for example the spatial distribution calculated for the case $T = 4.8\tau$

shown at the Fig. 1). Such a broadening is caused by both the quantum-mechanical diffraction of the wave-packet being prepared and the acceleration of the wave-packet. In what follows we will show that it is possible to suppress both diffraction and acceleration broadening using a simple modification of the time dependence of the laser field amplitude (which was time-independent in the above example).

Let us write the field amplitude $V(t)$ in a form

$$V(t) = \tilde{V} e^{-i \int_0^t \omega_{2,1}(z_s(t', p_0, z^*)) dt'}, \quad (4)$$

where the trajectory of the “resonant” point $z_s(t, p_0, z^*)$ should be optimized in such a way that at the final time T the state $|2\rangle$ atoms will form a narrow peak, centered at $z = z^*$. Notice that at a given time t the field (4) plays a role of a spatially localized source of atoms in internal state $|2\rangle$ and with momentum p_0 . Consider then a classical analog of our problem:

Find a trajectory $z_s(t, p_0, z^*)$ of a classical source of atoms of an initial momentum p_0 , such that all the atoms emitted will reach the “target” $z = z^*$ at a preselected time T . Atoms are supposed to be affected by a force $\mathcal{F}$.

Such a trajectory does exist: it is given by

$$z_s(t, p_0, z^*) = z^* - \frac{p_0(T-t)}{M} - \frac{F(T-t)^2}{2M}. \quad (5)$$

Let us now insert the *ansatz* (5) to the expression for the field amplitude (4) and evaluate the equations of motion using this amplitude. At time T the state $|2\rangle$ component of the atomic wave function will be given by

$$\begin{aligned} [\psi_2(z)]_{t=T} &= \frac{\sqrt{\rho_{\text{in}}}\tilde{V}}{\hbar\mathcal{F}} \int_{p_0}^{p_0+\mathcal{F}T} dp e^{ip(z-z^*)/\hbar} \\ &= \left(\frac{\tilde{V}T}{\hbar}\right) \sqrt{\rho_{\text{in}}} e^{i[(p_0+\mathcal{F}T/2)z/\hbar]} \text{sinc}\left[\frac{z-z^*}{\delta z(T)}\right], \end{aligned} \quad (6)$$

where for *all* interaction times T , the spatial width of the distribution reads $\delta z(T) = 2\hbar/F$, and *no diffraction or acceleration broadening is present* (solid line at Fig. 1). Here ρ_{in} is the initial density of atoms in the state $|1\rangle$. (Above we have omitted some insignificant constant phase factors depending on the definition of the internal states $|1\rangle$ and $|2\rangle$.) Note that the *sinc*-shape is ultimately the best approximation for a δ -functional peak $\delta(z - z^*)$ one can create using a $[p_0; p_0 + \mathcal{F}T]$ window in momentum space.

The *ansatz* (4,5) motivates our strategy for “de-Broglie wave-front engineering” of motional quantum states. Imagine that one’s goal is to prepare an atom in a motional state $\phi(z)$ (normalized to unity: $\int dz |\phi|^2 = 1$). Let us represent the “target” state as a continuous superposition of the δ -peaks: $\phi(z) = \int_{-\infty}^{+\infty} dz^* \delta(z - dz^*) \phi(z^*)$. The state engineering process will involve then the following steps:

1. Prepare the atom in the internal state $|1\rangle$ and in an external state corresponding to the $p = p_0$ eigenstate of the atomic momentum

$$[\psi_1(z)]_{t=0} = \sqrt{\rho_{\text{in}}} e^{+ip_0 z/\hbar}, \quad (7)$$

where the initial momentum p_0 is chosen in such a way that the momentum window $[p_0; p_0 + \mathcal{F}T]$ covers entirely the momentum distribution

$$\bar{\phi}(p) = \frac{1}{2\pi\hbar} \int_{-\infty}^{+\infty} dz e^{-ipz/\hbar} \phi(z) \quad (8)$$

of the “target” state, $\mathcal{F}$ and T being the typical magnetic field gradient and typical interaction time available in the given implementation;

2. Apply for a time T a laser field

$$V(t) = \tilde{V}(t) e^{-i \int_0^t \omega_{2,1}(z_s(t', p_0, 0)) dt'}, \quad (9)$$

where

$$\begin{aligned} \tilde{V}(t) &= \frac{\tilde{V}_0 \mathcal{F} T}{2\pi\hbar\phi(0)} \int_{-\infty}^{+\infty} dz^* e^{-ip(T, p_0)z^*} \times \\ &\quad e^{-i \int_0^t [\omega_{2,1}(z_s(t', p_0, z^*)) - \omega_{2,1}(z_s(t', p_0, 0))] dt'} \\ &= \frac{\tilde{V}_0 \mathcal{F} T}{\phi(0)} \times \bar{\phi}(p(t, p_0)) \end{aligned} \quad (10)$$

is the field amplitude adjusted to the “target” state, and $p(t, p_0) = p_0 + \mathcal{F}(T-t)$;

3. At the time T measure the internal state. If the atom remains in the state $|1\rangle$, repeat the above steps. If atom is detected in the state $|2\rangle$, the preparation procedure is complete.

After a lengthy but straightforward calculation one can show that in the course of the preparation procedure the initial state gets transformed to a state

$$[\psi_2(z)]_{t=T} = \int_{p_0}^{p_0+\mathcal{F}T} dp \bar{\phi}(p) e^{+ipz/\hbar} \approx \phi(z), \quad (11)$$

very close to the “target” state ϕ , which was, we recall, assumed to be localized in momentum space within a range covered by the $[p_0; p_0 + \mathcal{F}T]$ interval. This is the central result of our paper.

Notice that the field amplitude (9) is, apart from an overall time-independent amplitude, a product of two distinct time-dependent factors. The second one is not specific for a particular “target”, but only for a given momentum window $[p_0; p_0 + \mathcal{F}T]$. This factor can be set once and for all for a broad class of targets. We recall that the purpose of this factor is to *compensate the quantum-mechanical diffraction and acceleration* of the

distribution being generated. The first factor (10) corresponds to a finite duration pulse whose amplitude is proportional to the target wave function $\phi(p)$ in the momentum representation: it allows encoding of the “target” wave-function in the spectrum of the applied laser field.

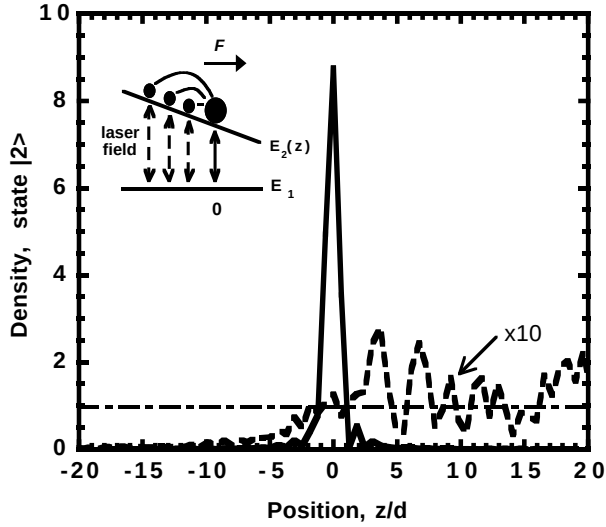


FIG. 1. Spatial distribution of atoms in the state $|2\rangle$ (*ab initio* quantum-mechanical simulation). The desired pattern corresponds to a δ -functional peak centered at $z = 0$. Dashed line is a result of an application of a monochromatic field at resonance at $z = 0$. Solid line shows the “de-Broglie wave-front engineering” result, where the frequency was chirped according to “classical” *ansatz* (4,5) taken at $p_0 = 0$. Dashed-dotted line shows the initial distribution of the state $|1\rangle$ atoms. Interaction time is $T = 4.8 \times \tau$, field amplitude is $\tilde{V} = 1. \times (\hbar/\tau)$. The characteristic length d and time τ of the problem are defined by the expressions (2) and (3) respectively. The inset illustrates the basic idea of the “de-Broglie Wave-Front Engineering” method: the trajectory of the resonant point is designed in such a way that state $|2\rangle$ atoms created at different stages of the process come to the target at the same time $t = T$.

Let us discuss now possible implementations of our scheme in the field of *atom lithography*. Consider a set-up depicted in Fig. 2a. We assume that a beam of atoms in state $|1\rangle$ with a mean longitudinal velocity $\langle v_{x,0} \rangle$ interacts with a superposition of a Gaussian laser beam of a time-dependent amplitude and two magnetic fields (z - and x -dependent respectively). The amplitude of the x -dependent component of the magnetic field $H_2(x) = -\beta(x - x_{\text{det}})^2$ is chosen to be equal to $\beta = \mu_{\text{Bohr}} g \alpha^2 / 2M \langle v_{x,0} \rangle^2$. The z -dependent component of the magnetic field is the same as in the previous example.

Consider first an idealized case of a monochromatic ($v_{x,0} = \langle v_{x,0} \rangle$) ideally collimated ($v_{y,0} = v_{z,0} = 0$) atomic beam, $\mathbf{v}_0$ being the velocity of atoms in the incoming beam. Within the paraxial approximation and in the

interaction picture with respect to the x -dependent Zeeman shift, the laser field “seen” by a moving atom reads

$$V(\tilde{t}) = \tilde{V}(\tilde{t} + t_{\text{in}}) e^{-\pi(\tilde{t} - T/2)^2 / T_{\text{laser}}^2 - i \int_0^{\tilde{t}} \omega_{2,1}(z_s(\tilde{t}', 0, 0)) d\tilde{t}'} \quad (12)$$

where $\hbar\omega_{2,1}(z) = \hbar\omega_{2,1}(0) - \mathcal{F}z + R$, $R = \hbar^2 k^2 / 2M$ is the recoil energy, $\mathbf{k}_{\text{laser}} = k\mathbf{e}_y$ is the wave vector of the incident light, $\tilde{t} = t - t_{\text{in}}$ is the time counted from the “entering” time t_{in} when the atom enters the interaction zone $[x_{\text{in}} \leq x \leq x_{\text{det}}]$, the left edge of the interaction zone is conventionally defined as $x_{\text{in}} = x_{\text{det}} - 2(x_{\text{det}} - x_{\text{laser}})$, the interaction time is given by $T = (x_{\text{det}} - x_{\text{in}}) / v_{x,0}$, the “source trajectory” is defined by the expression (5), and the time width of the Gaussian pulse is $T_{\text{laser}} = \sqrt{\pi/2} w / \langle v_{x,0} \rangle$ where w is the spatial waist of the Gaussian beam.

Imagine that one’s goal is to generate, by choosing a proper time dependence of the field amplitude $\tilde{V}(t)$, a pre-chosen “target” density profile $\sigma(z)$ (scaled in such a way that $\sigma(0) = 1$) in the detector plane $x = x_{\text{det}}$ (or, equivalently, at $\tilde{t} = T$). The quantum state engineering recipe (10) does not directly apply: according to this recipe the function $\tilde{V}(t)$ should be a finite-duration time pulse, and the probability for atom to join the interaction zone at the time of the pulse would vanish for long exposure times. In other words, the field amplitude (12) contains a new (as compare to (9,10)) uncontrollable parameter t_{in} , randomly distributed within an interval $[0; T]$, T being the “exposure time”. We suggest now to replace the pulse (10) by a *periodic* sequence of pulses.

Let us consider the following *ansatz* for the field amplitude:

$$\tilde{V}(t) = \tilde{V}_0 \sum_{n=-N}^{+N} \sqrt{\sigma(z_n)} e^{-i\omega_n t}, \quad (13)$$

where $z_n = \Delta z n$, and $\omega_n = \omega_{2,1}(z_n)$; the space domain $[-\Delta z N; +\Delta z N]$ is supposed to cover the target’s profile $\sigma(z)$. For long enough deposition times $T \gg N/\Delta\omega$ the surface density of the state $|2\rangle$ deposited on the detection plane will be given by a sum of Gaussians profiles with an envelope given by the “target” pattern:

$$n(y, z) \approx n_0 \sum_{n=-N}^{+N} \sigma(z_n) e^{-\frac{(z-z_n)^2}{2(\delta z)^2}} \approx n_0 Q(\delta z / \Delta z) \sigma(z),$$

where the width of an individual Gaussian is given by $\delta z = \sqrt{\pi} \hbar / \mathcal{F} T_{\text{laser}} = \sqrt{2} \hbar \langle v_{x,0} \rangle / \mathcal{F} w$, the overall density amplitude is $n_0 = (j_{\text{in}} T) (V T_{\text{laser}} / \hbar)^2$, j_{in} is the flux density in the incoming atomic beam, and $Q(\zeta) = \sum_{n'=-\infty}^{+\infty} \exp[-(n')^2 / 2\zeta^2]$. Notice that the produced pattern does not depend on particular values of the entering times t_{in} of the individual atoms, as a result of averaging over a uniform distribution of t_{in} within an interval

$[0; T]$. As in the previous example the spatial resolution δz of the atomic pattern engineering method is limited *only* by the position-momentum uncertainty relation $\delta z \sim \hbar/\mathcal{F}T_{\text{laser}}$.

In Fig.2b we show the result of our attempt to generate the “boa swallowed an elephant” pattern [12], using this method.

For a realistic atomic beam of a finite spread in the longitudinal ($\delta v_{x,0}$) and transverse ($\delta v_{z,0}$ and $\delta v_{y,0}$) velocities, the spatial resolution of the above lithographic method will be limited by $\delta(\delta v_{x,0})z \sim (\mathcal{F}T^2/M)(\delta v_{x,0}/\langle v_{x,0} \rangle)$, $\delta(\delta v_{z,0})z \sim \delta v_{z,0}T$, and $\delta(\delta v_{y,0})z \sim k\delta v_{y,0}/\mathcal{F}$, respectively.

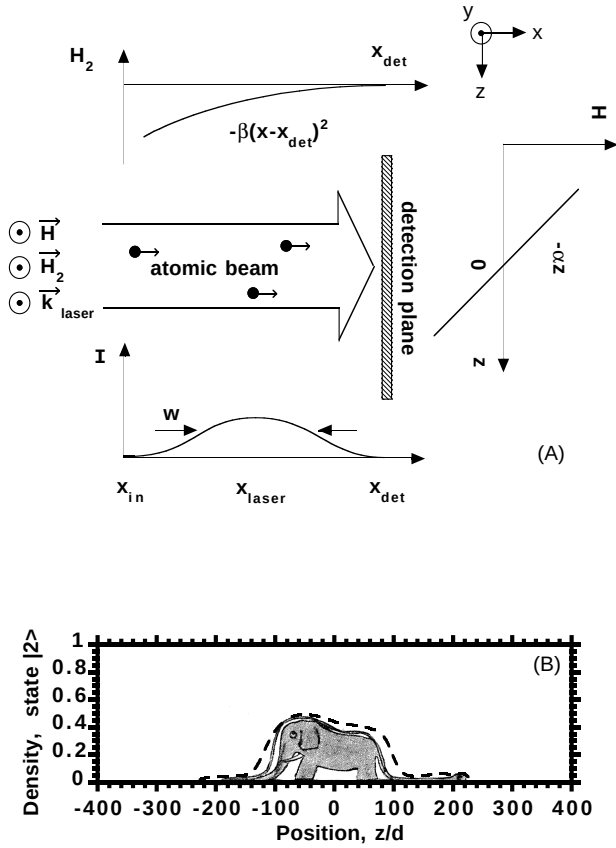


FIG. 2. A possible implementation of the “de-Broglie Wave-Front Engineering” technique in atom lithography. (a) Schematics of the set-up. (b) Numerical simulation of an attempt to reproduce the “boa swallowed an elephant” pattern [12] using the de-Broglie engineering technique. Dashed line shows the spatial distribution of atoms in the state $|2\rangle$ in the detection plane. Interaction time is $T = 1. \times \tau$, Rabi frequency is $\bar{V}_0 = 1. \times \hbar/\tau$. Time width of the Gaussian pulse is $T_{\text{laser}} = 0.3 \times \tau$. The pattern is represented by $2N + 1 = 127$ pixels on a $\Delta z = 3.7 \times d$ grid. The distribution is a result of averaging over 20 Monte-Carlo realizations corresponding to the “entering time” t_{in} randomly distributed within an interval $[0; 2\pi/\Delta\omega]$, where $\Delta\omega = \mathcal{F}\Delta z/\hbar$. The characteristic length d and time τ of the problem are defined by the expressions (2) and (3) respectively.

To conclude, we have presented a method for generation of an *arbitrary* motional quantum state of a free atom. For a target state $\phi(z)$ such that its momentum representation $\bar{\phi}(p)$ is well localized within an interval $[p_{\text{min}}; p_{\text{max}}]$, our *de-Broglie wave-front engineering* method allows one to create a state

$$e^{ip_0 z/\hbar} \longrightarrow \int_{p_0}^{p_0 + \mathcal{F}T} dp \bar{\phi}(p) e^{ipz/\hbar} \approx \phi(z),$$

where the initial momentum p_0 and the interaction time T are chosen in such a way that the interval $[p_{\text{min}}; p_{\text{max}}]$ belongs to the $[p_0; p_0 + \mathcal{F}T]$ window, $\mathcal{F}$ being the gradient force used in course of the generation procedure.

We foresee that, using the classical-mechanical analogy similar to (5), our method can be easily generalized to the case of trapped particles.

We present also a modification of the method, suitable for lithography with atomic beams. The spatial resolution of the suggested lithographic method is limited only by the position-momentum uncertainty relation, and neither quantum-mechanical diffraction of the pattern nor acceleration of atoms during the generation process affects the resolution.

Let us give some realistic estimates for the spatial resolution one can achieve using the above lithographic method; we will use Fig. 1 as an example. Recall that this plot shows the narrowest peak, which could be obtained for given values of the field gradient $\mathcal{F}$ and interaction time T . For the Argon mass $M = 30\text{amu}$ and a realistic value of the magnetic-field-induced (alternatively the Stark shift in a spatially varying laser field induced [11]) gradient force $\mathcal{F}/\hbar = 2\pi \times 10^9\text{Hz/cm}$ ($2\pi \times 10^{12}\text{Hz/cm}$) the natural units of length and time will be given by $d = (\hbar^2/2M\mathcal{F})^{1/3} = 108\text{nm}$ (10.8nm) and $\tau = (2\hbar M/\mathcal{F}^2)^{1/3} = 14.7\mu\text{s}$ ($.147\mu\text{s}$), respectively. The HWHM of the peak shown in Fig. 1 will correspond then to 63.0nm (6.3nm) obtained for an interaction time of $T = 4.8\tau = 70.8\mu\text{s}$ ($.708\mu\text{s}$). Note also that lithography techniques sensitive to the internal state of atoms do exist and they were experimentally demonstrated for the case of metastable atoms [13].

We would like to express our appreciation for many useful discussions with J. Eberly, K. S. Johnson, W. D. Phillips, B. Shore, J. H. Thywissen, G. Zabow, and P. Zoller.

M.O. was supported by the National Science Foundation grant for light force dynamics #PHY-93-12572. N.D. was supported by the NSF grant for Materials Research Science and Engineering Center #DMR-9400396. C.H. was supported by Harvard University. This work was also partially supported by the NSF through a grant for the Institute for Theoretical Atomic and Molecular Physics at Harvard University and the Smithsonian Astrophysical Observatory.

- [1] B. Sherman and G. Kurizki, Phys. Rev. A **45**, R7674 (1992)
- [2] K. Vogel, V. M. Akulin, W. P. Schleich, Phys. Rev. Lett. **71**, 1816 (1993)
- [3] B. M. Garraway, B. Sherman, H. Moyacessa, P. L. Knight, and G. Kurizki, Phys. Rev. A **49**, 535 (1994)
- [4] A. Kozhekin, G. Kurizki, B. Sherman, Phys. Rev. A **54**, 3535 (1996)
- [5] A. S. Parkins, P. Marte, P. Zoller, H. J. Kimble, Phys. Rev. Lett. **71**, 3095 (1993)
- [6] A. S. Parkins, P. Marte, P. Zoller, O. Carnal, H. J. Kimble, Phys. Rev. A **51**, 1578 (1995)
- [7] C. K. Law, J. H. Eberly, Phys. Rev. Lett. **76**, 1055 (1996)
- [8] S. A. Gardiner, J. I. Cirac, P. Zoller, P., Phys. Rev. A **55**, 1683 (1997)
- [9] C. K. Law and J. H. Eberly, Optics Express **2**, 368 (1998)
- [10] B. Kneer and C. K. Law, Phys. Rev. A **57**, 2096 (1998)
- [11] J. E. Thomas and L. J. Wang, Physics Reports, **262**, 311 (1995)
- [12] A. Saint-Exupéry, *Petit Prince* (Gallimard, Évreux (1997))
- [13] K. K. Berggren, A. Bard, J. L. Wilbur, J. D. Gillaspay, A. G. Heig, J. J. McClelland, Steven L. Rolston, William D. Phillips, Mara Prentiss, and George M. Whitesides, Science **269**, 1255 (1995); K. S. Johnson, J. H. Thywissen, N. H. Dekker, K. K. Berggren, A. P. Chu, R. Younkin, and M. Prentiss, Science **280**, 1583 (1998)